Citroen Jumper

PolarLine® by Novaplast

Fast & Easy installation

Food delivery, catering and biomedical transport

NOVAPLAST®
thermo-insulated solutions

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015

Citroen Jumper

PolarLine®
NOVAPLAST
thermo-insulated solutions

	L2H1	L2H2	L3H2
Wheelbase (mm)	3450	3450	4035
Roof	Low	High	High
Volume (m3)	7	8	9.5
Loading floor length (mm)	2775/2825	2775/2825	3360/3410
Loading floor width (mm)	1540/1750	1450/1750	1450/1750
Loading floor height (mm)	1500	1775	1775
Side door width (mm)	1090	1090	1090
Side door height (mm)	1430	1640	1640
Rear door width (mm)	1440	1440	1440
Rear door height (mm)	1460	1670	1670
Width between wheel arches (mm)	1290	1290	1290

FEATURES

- Polyurethane foam panels, thickness 60mm
- Wood-reinforced floor
- Grey non-skid “tub” floor
- Reinforced roof for refrigeration unit application
- Double seal on rear and side doors
- Suitable for IR transport (-20°C) with the application of high density polyurethane

ACCESSORIES

- LED lights
- Walls reinforced for shelves
- Roof and wall construction for transporting meats with stainless steel rails and hooks
- Drain valve with drain pipe
- Anti-drip edges on the doors
- VTR liquid collection reservoir
- Cargo restraint profiles with straps
- IR rear and side doors (-20 ° C)
- Customizable setups upon request

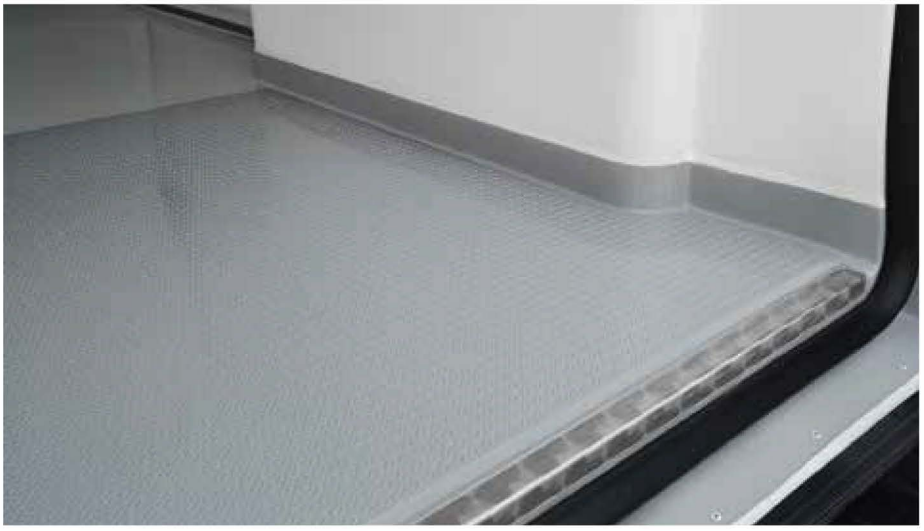

NOVAPLAST
thermo-insulated solutions

info@novaplastpg.it
www.novaplastpg.it