Opel Vivaro

PolarLine® by Novaplast

Fast & Easy installation

Food delivery, catering and biomedical transport

MADE IN ITALY

NOVAPLAST®
thermo-insulated solutions

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015

Opel Vivaro

PolarLine®
NOVAPLAST
allestimenti isotermici

	Medium	Long
Wheelbase (mm)	3.275	3.275
Roof	Low	Low
Volume (m3)	3,28	3,90
Load floor length (mm)	2.070	2.440
Load floor width (mm)*	1.205/1.430	1.205/1.430
Load floor height (mm)*	1.180/1.220	1.180/1.220
Side door width (mm)	810	810
Side door height (mm)	1.080	1.080
Rear door width (mm)	1.205	1.205
Rear door height (mm)	1.130	1.130
Width between wheel arches	1.205	1.205

*(min/max)

FEATURES

- Polyurethane foam panels, thickness 60mm
- Wood-reinforced floor
- Grey non-skid “tub” floor
- Reinforced roof for refrigeration unit application
- Double seal on rear and side doors
- Suitable for IR transport (-20°C) with the application of high density polyurethane

ACCESSORIES

- LED lights
- Walls reinforced for shelves
- Roof and wall construction for transporting meats with stainless steel rails and hooks
- Drain valve with drain pipe
- Anti-drip edges on the doors
- VTR liquid collection reservoir
- Cargo restraint profiles with straps
- Additional rear and side doors (-20 °C)
- Customizable setups upon request

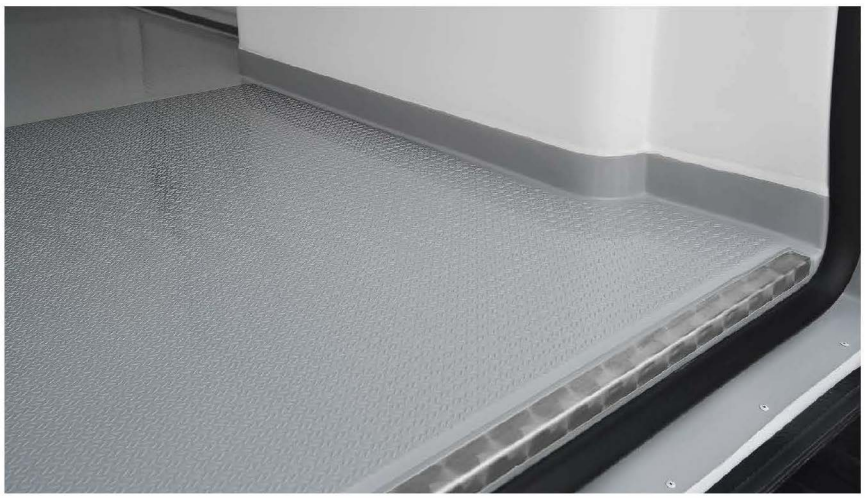

NOVAPLAST
thermo-insulated solutions

info@novaplastpg.it
www.novaplastpg.it